


TRITUFF COPOLYESTER ALUMINUM CURB MOUNTED LOUVERED SKYLIGHT

BRISTOLITE COPOLYESTER GLAZING HAS BEEN LOAD TESTED AND COMPLIES WITH OSHA - CFRS FOR FALL PROTECTION.

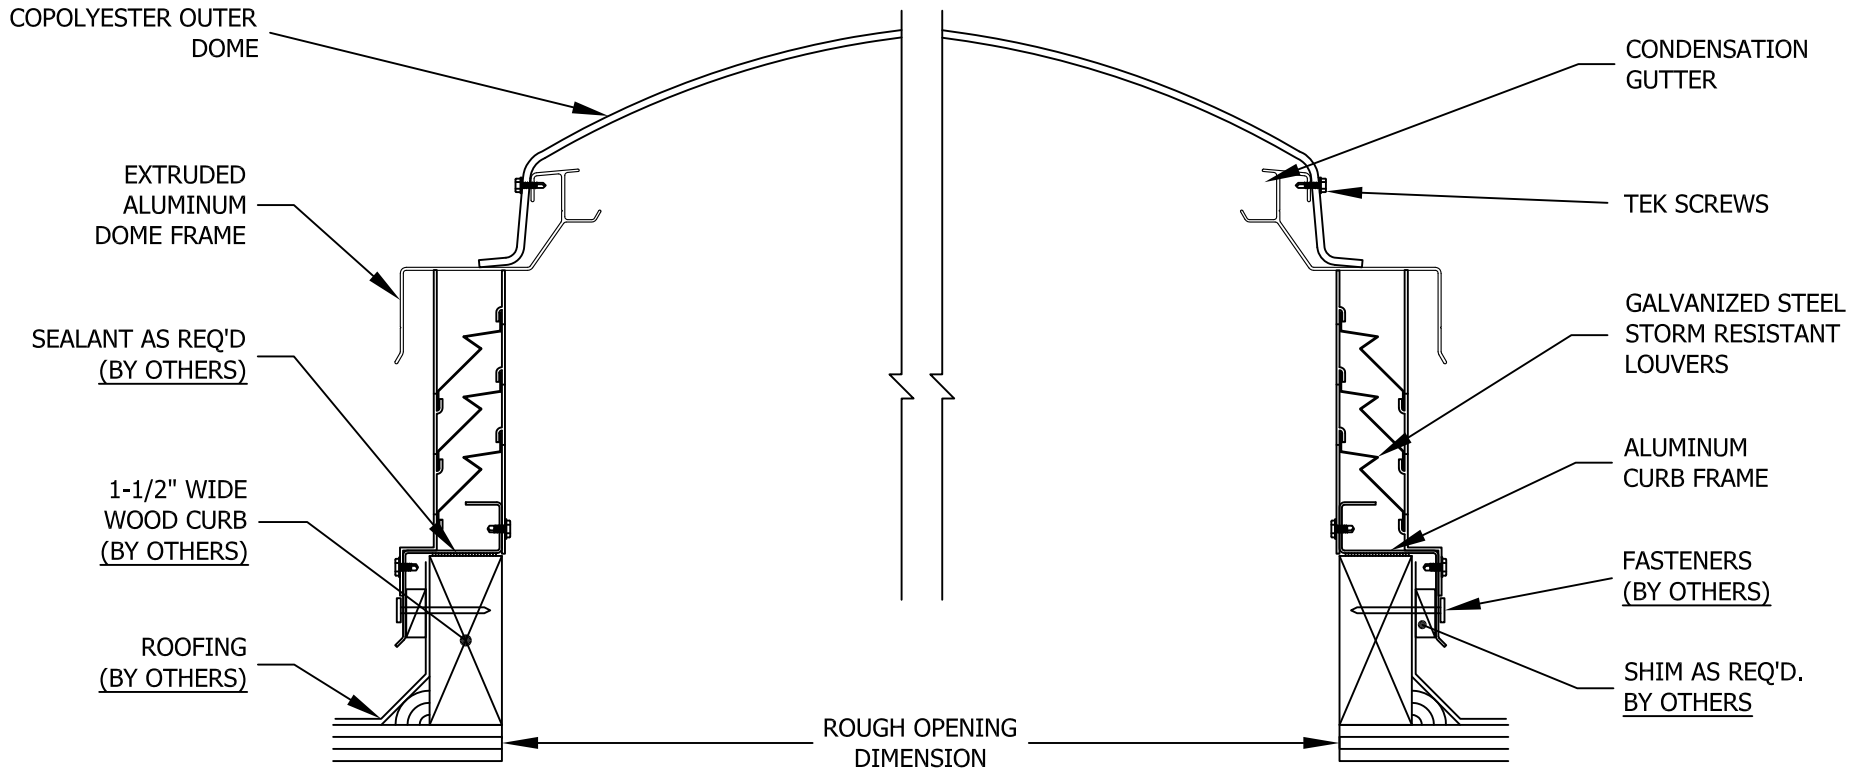

MODEL: FXXXX-SL-CM-1-MF
(NOT TO SCALE)

SL - ALUMINUM SKYLIGHT LOUVERED
CM - CURB MOUNTED
1 - SINGLE DOME
MF - MILL FINISH

MODEL SIZE	ROUGH OPENING DIMENSION	QTY
4848	48" x 48"	
4896	48" x 96"	

DOME MATERIAL TESTED IN CONFORMANCE WITH:

- HIGH WIND RESISTANT - DOME OF THIS UNIT HAS EXCEEDED 90MPH UPLIFT IN TESTING.
- BURN RATE - TRI-TUFF MATERIAL CLASSIFIED AS CC1 MATERIAL.
- TESTED AND MET LOAD REQUIREMENTS PER OSHA 29 CFR 1910.23 (e) (8).
- TESTED AND MET REQUIREMENTS AS DESCRIBED IN "STANDARD PRESENTATION TO CALIFORNIA OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD - STATE STANDARD, TITLE 8, CHAPTER 4, SECTION 1632 (REPORT NUMBER 3075015-1).
- TESTING PERFORMED ON 48"x96" TRI-ARCH DOME.

Bristolite Daylighting Systems

401 East Goetz Avenue, Santa Ana, CA. 92707
TEL 714.540.8950 / FAX 714.540.5415

CUSTOMER :

PROJECT :

PREPARED BY :

SUBMITTAL DATE :

JOB NO :

ARCHITECT :