


Residential Skylight

### Acrylic Double Hip Dome

Details (Scale: 3":1'-0")

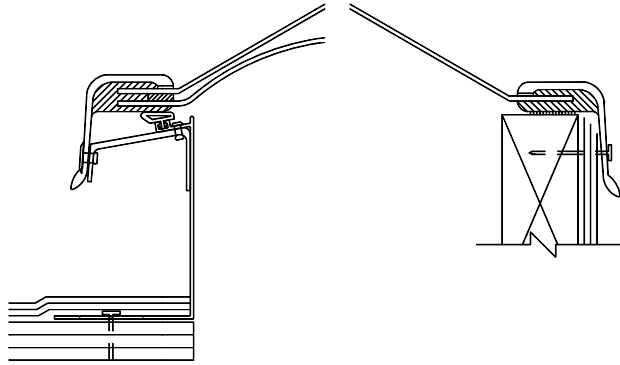

AS-SF-2-DH

AS-CM-1-DH

### Specifications

Thermoweld Skylight shall be model No. \_\_\_\_\_ as manufactured by Bristolite Daylighting Systems, Santa Ana, CA. Skylights shall be fully factory assembled consisting of acrylic double hip glazing with a CC-2 classification that shall be fused to its own counter flashing fiberglass skirt through the Thermoweld process. The base frame shall be installed either on a 1-1/2" wide curb furnished by others or on its own 4", 9", or 12" high self flashing curb fabricated from aluminum with a 2-3/4" roof flange. Standard slope of a double hip dome to be 30° rise.

### Sizes:

Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension
2230-AS	22 1/4" x 30 1/4"	3496-AS	34" x 96"	6072-AS	60" x 72"		
2237-AS	22 1/4" x 37"	3696-AS	36" x 96"	6096-AS*	60" x 96"		
2246-AS	22 1/4" x 46 1/4"	3746-AS	37" x 46 1/4"				
2272-AS	22 1/4" x 72"	3775-AS	37" x 75"				
2296-AS	22 1/4" x 96"	3859-AS	38" x 59"				
3037-AS	30 1/4" x 37"	4669-AS	46 1/4" x 69 1/2"				
3046-AS	30 1/4" x 46 1/4"	4689-AS	46 1/4" x 89 1/2"				
3069-AS	30 1/4" x 69 1/2"	4896-AS	48" x 96"				
3096-AS	30 1/4" x 96"	5460-AS	54" x 60"				

\*Sizes are **only** available in the following acrylic colors: WTM, CC or BT.

Solar Heat Gain Coefficient = .50, U Factor = .56, Visible Light Transmission = 53% (Typical for WTM double glazed units)

### Features:

1. Curb Mounted (CM) or Self Flashing (SF)
2. Four Acrylic Color Choices: Medium White (WTM), Bronze (BT), Grey (GT) or Clear (CC)
3. Standard Bronze Color Fiberglass Frame Finish  
Add highlighted suffixes to model number where applicable:  
i.e. 3030-AS-CM-2-WTM-P-WGEL

### Options:

1. Insulating Double Domes (2) or Single Dome (1)
2. Dome or Pyramid (P) Shaped Dome (selected sizes)
3. Polycarbonate Dome (PC) (inner dome only)

### Options: (cont.)

4. Impact Modified Prismatic Acrylic Glazing (WPM/CPM) (inner dome only) Up to and including 4896 and 6072, no larger
5. Base Frame Finish (self flashing only) – Bronze Anodize (BA), Clear Anodize (CA), White Painted (WP) or Mill Finish (MF)
6. Fiberglass Frame Finish – White Gel (WGEL)
7. Self Flashing Bases of 9" or 12" (9 or 12)
8. Insulated Frame (INS)

### Accessories: See PDS (Product Data Sheets) for these Items

1. Quickkit (Installation Kits)
  - a. Stainless Steel (QKSS)
  - b. Zinc Plated (QKZP)