

Industrial Louvered Skylight and (Optional) Security Grill


Fiberglass Dome

Frame Material Aluminum

Bristolite fiberglass glazing has been load tested and complies with OSHA – CFR's for fall protection.

Details (Scale: 2":1'-4")

Specifications

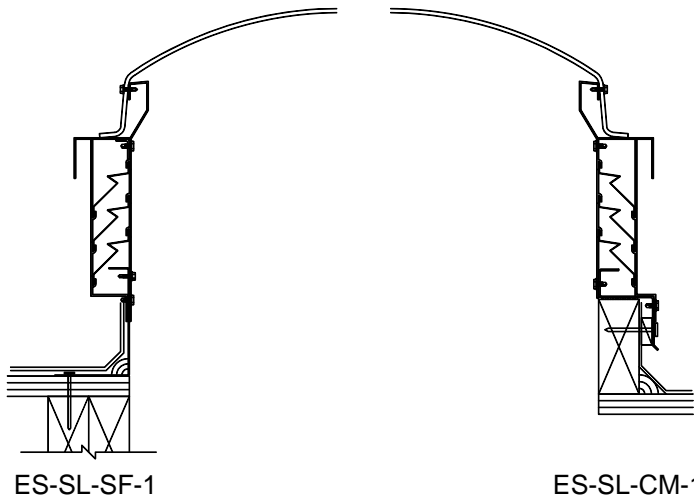

Energy Star Skylight shall be model No. _____ as manufactured by Bristolite Daylighting Systems, Santa Ana, CA. The fiberglass dome shall be an impact resistant molded one piece unit with integral counter flashing skirt to eliminate any dependence on gaskets, sealants or flow through designs. The Fiberglass shall consist of neopentyl glycol isophthalic gelcoat laminate with an acrylic modified polyester based resin with UV light stabilizers and silane glass fibers. These units are attached to a 6063 alloy extruded aluminum frame through use of corrosive resistant aluminum fasteners. The louvers will be fixed storm resistant louver blades of 22 gauge galvanized steel and shall be continuous. The base frame shall be installed either on a 1-1/2" wide curb furnished by others or on its own 4", 9", or 12" high self flashing curb fabricated from aluminum with a 2-3/4" roof flange. Materials are to be self extinguishing Approved Plastic CC-1 Rated.

Materials tested in conformance with FM 4431 including 2" severe hail test.

Sizes:

Model Number	Inside Curb Dimension	Approx. Amount of Free Air Space in Sq. Ft.	Model Number	Inside Curb Dimension	Approx. Amount of Free Air Space in Sq. Ft.
4848-ES-SL	48" x 48"	6.0	4896-ES-SL	48" x 96"	9.0
			6072-ES-SL	60" x 72"	8.0

Solar Heat Gain Coefficient = .46, U Factor = .63, Visible Light Transmission = 63% (Typical for ESA double glazed units)

Features:

1. Curb Mounted (CM) or Self Flashing (SF)
2. Impact Resistant (IR) – Can withstand a heavy impact
3. High Wind Resistant (HW) – Can withstand high wind conditions
4. Energy Star Glazing (ESA)
Add highlighted suffixes to model number where applicable:
i.e. 4896-ES-SL-CM-1-ESA-IR-HW-MF-DF

Accessories: See PDS (Product Data Sheets) for these Items

1. Gladiator
 - a. Structural Curb (SC)
 - b. Security Grills (SG)
 - c. Safety Screens (SSCRN)
2. Quickkit (Installation Kits)
 - a. Stainless Steel (QKSS)
 - b. Zinc Plated (QKZP)

Options:

1. Frame Finish - Bronze Anodize (BA), Clear Anodize (CA), White Painted (WP) or Mill Finish (MF)
2. Self Flashing Bases of 9" or 12" (9 or 12)
3. Insulated Frame (INS)
4. Double Wall Frame (DW)
5. Insect Screens (IS) or Bird Screens (BS)
6. Rain Guard (RG) and/or Dust Filters (DF)