




Frame Material: Aluminum

Litebox with Prismatic Diffuser

Details:

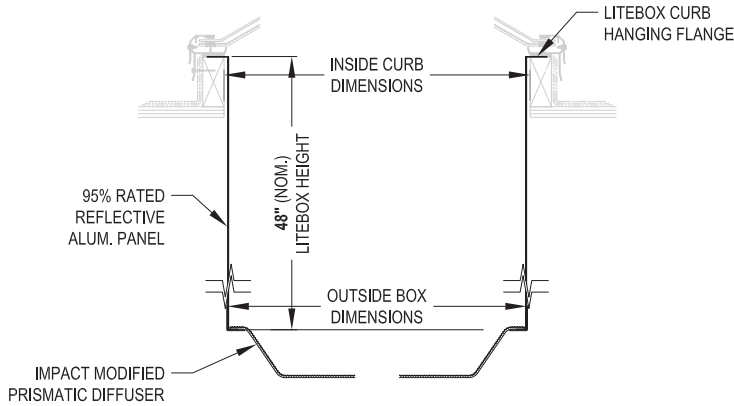

Specifications:

Quasar Litebox shall be model No. _____ as manufactured by Bristolite Daylighting Systems, Santa Ana, CA. The Litebox utilizes 0.02" thick aluminum sheet walls manufactured within a vacuum to achieve total reflective rating of $\geq 95\%$. Corners are trimmed with 1/16" thick aluminum sheet metal. Corner trimming angles are attached to aluminum sheet walls with high strength, double-sided VHB tape. The bottom plastic dome using prismatic material sits on a supporting 1/16" thick aluminum angle, also on T-Bar suspended ceiling framework for drop ceiling installations. Outside box dimension is 1/2" smaller than inside curb dimension. Materials are to be Approved Plastic CC-2 Rated. Litebox is shipped flat and assembled on site with roof curb and skylight sold separately.

Sizes:

Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension	Model Number	Inside Curb Dimension
2424-LBX	24" x 24"			2448-LBX	24" x 48"		
4848-LBX	48" x 48"			6072-LBX	60" x 72"		
				4896-LBX	48" x 96"		
Call for additional sizes				Call for additional sizes			

Features:

1. Mounts Inside Roof Curb
 2. Standard Box Depth of 4 feet (4)
 3. Inside Diffuser: White Prismatic Acrylic (WPM)
 4. Does Not Include Roof Curb or Skylight
- Add highlighted suffixes to model number where applicable:
i.e. 2424-LBX-4-WPM

Options: (cont.)

1. Custom Heights
2. Roof Curb & Skylight

Accessories: See PDS (Product Data Sheets) for these Items

1. Gladiator
 - a. Security Grills (SG)
 - b. Safety Screens (SSCRN)
 - c. External Safety Cages (SCAGE)