

Description

Lexan XL102UV sheet combines the impact strength of Lexan polycarbonate sheet with a proprietary UV-resistant surface treatment on both sides that protects it from weathering. Lexan XL102UV sheet is the only polycarbonate glazing material backed by a ten-year limited warranty against yellowing, loss of light transmission and breakage[#]). Providing long-lasting clarity over a wide range of weather conditions and environments, Lexan XL102UV sheet improves service life and reduces life-cycle material costs. Lexan XL102UV sheet is well suited for all types of vertical glazing and overhead applications such as skylights, covered walkways and barrel vaults.

Typical Property Values ♦

Property	Test Method	Unit	Value
Physical			
Specific Gravity	ASTM D792	-	1.20
Sound Transmission, STC Rating (36" x 84")	ASTM E9070	-	
@ 0.118"			25
@ 0.177"			29
@ 0.236"			31
Light Transmission (Average)	ASTM D1003	%	88
Rockwell Hardness	ASTM D785	-	M70, R118
Chemical Resistance	ANSI Z26.1		Passes
Mechanical			
Tensile Strength @ yield	ASTM D638	psi	9,300
Tensile Modulus	ASTM D638	psi	345,000
Flexural Strength	ASTM D790	psi	14,000
Flexural Modulus	ASTM D790	psi	360,000
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	psi	1,000
Compressive Strength @ yield	ASTM D695	psi	10,400
Elongation	ASTM D638	%	85
Izod Impact Strength, up to 125 mils, Notched Drop	ASTM D256A	ft-lbs-in	12-18
Dart Impact Strength, 1" dia. Dart @ 73°F	SABIC Test [£]	ft-lbs	>200
@ 0°F			>200
Thermal			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x10 ⁻⁵
Thermal Shrinkage	SABIC Test	%	1
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	
@ 66 psi			270
Shading Coefficient	ASHRAE	-	280
Clear			1.02
Grey/Bronze			.79
Flammability			
Horizontal Burn (Flame Spread), AEB	ASTM D635	in	<1
Ignition Temperature Flash	ASTM D1929	°F	873
Self			1,076

[#] Request details of limited warranty and maintenance instructions

♦ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics, Specialty Film & Sheet representative.

[£] Measured by dropping a 5-pound dart (1" dia. tip) from a height of 40 feet. These are typical properties and are not intended for specification purposes. If minimum certifiable properties are required, please contact your local SABIC Innovative Plastics representative or the SABIC Innovative Plastics Quality Services Department.

* Lexan is a trademark of SABIC Innovative Plastics IP BV

Lexan*XL102UV Sheet

Product Datasheet

Energy Efficiency

Lexan XL102UV sheet provides up to 25% better thermal insulation than single-panel glass. Double glazing increases the advantage.

U-Value Comparison

Winter Heat Loss (BTU/hr./sq.ft./°F)			
Thickness	Lexan XL102UV Sheet	Glass	Lexan* Sheet % Advantage Over Glass
.118"	1.05	1.16	10
.177"	1.01	1.15	12
.236"	.96	1.14	16
Double Glazed#	.43	.49	12

Two ¼ liters with ½" air space

Summer Heat Gain (BTU/hr./sq.ft./°F)			
Thickness	Lexan XL102UV Sheet	Glass	Lexan* Sheet % Advantage Over Glass
.118"	.97	1.04	7
.177"	.93	1.04	11
.236"	.90	1.04	14
Double Glazed#	.43	.56	20

Two ¼ liters with ½" air space


Weight

Only 15% the weight of double-panel glass, Lexan XL102UV sheet requires less structural support than either glass or acrylic. Its light weight also results in easier handling and installation, as well as transportation cost savings.


Weight (Ibs./ft.²)		
Thickness	Lexan* XL102UV Sheet	Glass
.118"	.74	1.60
.177"	1.11	2.40
.236"	1.47	3.20

Impact Resistance

Virtually unbreakable, Lexan XL102UV sheet has 250 times the impact strength of glass and 30 times that of acrylic.

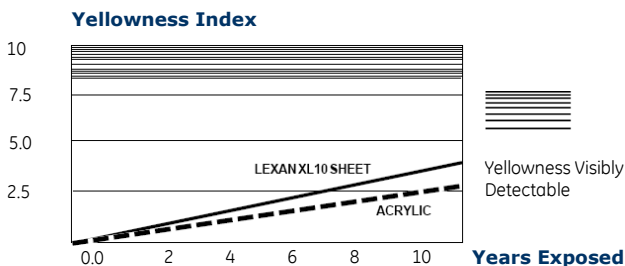

- ¼" Lexan XL102UV Sheet
- ¼" Acrylic
- ¼" Tempered Glass
- ¼" Laminated Glass

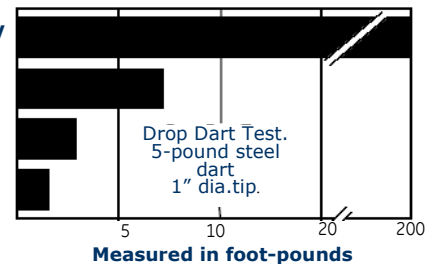



* Trademark of SABIC Innovative Plastics IP BV

Americas:
SABIC Innovative Plastics
Specialty Film & Sheet
One Plastics Avenue
Pittsfield, MA 01201
USA
Tel. (1) (413) 448 5400
Fax. (1) (413) 448 7506
Toll free: 1-800 451 3147

Europe:
SABIC Innovative Plastics
Specialty Film & Sheet
Plasticslaan 1
NL - 4612 PX Bergen op Zoom
The Netherlands
Tel. (31) (164) 292911
Fax. (31) (164) 293272

Pacific:
SABIC Innovative Plastics
Specialty Film & Sheet
1266 Nanjing Road (W)
16th Floor, Plaza 66
200040 Shanghai
China
Tel. (86) 21 6288 1088
Fax. (86) 21 6288 0818

THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of Sabic Holding Europe BV

* Trademark of SABIC Innovative Plastics IP BV