

# Natural Series


## UL Curb Mount Dropout



**Model**  
**ASLDOUL**  
**Frame Material**  
Aluminum

### Acrylic Heat/Smoke Vent

#### Cut Section (N.T.S.)

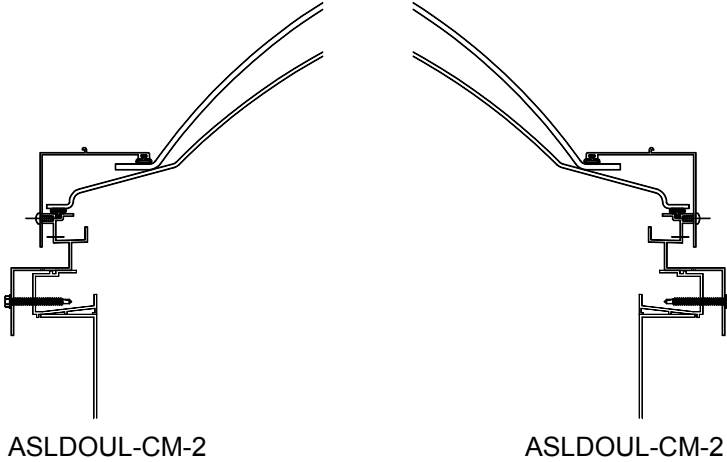

#### Specifications

Model ASLDOUL shall be manufactured by Bristolite Daylighting Systems, 100 Metro Dr. Terrell TX 75160, (855) 266-1331. Automatic heat and smoke vent shall be factory assembled for installation on curbs by others. Dropout design shall consist of an outer dome of cast acrylic plastic and a heat activated inner dome of cast acrylic plastic. Frame shall be extruded aluminum with integral condensation gutter. Units shall be designed to drop out when subjected to the UL fire test.

#### Sizes:

Model Number	Inside Curb Dimension	Inside Frame Dimension	Model Number	Inside Curb Dimension	Inside Frame Dimension
5555-ASLDOUL	48" x 48"	52-29/32" x 52-29/32"	5566-ASLDOUL	48" x 60"	52-29/32" x 64-29/32"
			5578-ASLDOUL	48" x 72"	52-29/32" x 76-29/32"
			5596-ASLDOUL	48" x 90"	52-29/32" x 94-29/32"
			55102-ASLDOUL	48" x 96"	52-29/32" x 100-29/32"
Call for additional sizes			Call for additional sizes		

#### Features:

1. Curb Mounted (**CM**)
  2. Underwriters Laboratory (UL) Listed
  3. Double glazed **CDO/WDO** for better insulating (2)
  4. Single leaf design for more daylighting per unit
- Example model number:  
**5555-ASLDOUL-CM-2-CDO/WDO-MF**

#### Options:

1. Exterior manual release
2. OSHA complying Gladiator External Safety Cage fall protection